

Lift&Drive Data Centre Lifter

Technical data



Technical data

Model	DC15 U42	DC15 U60	DC09 U42	DC09 U52
Article number	191542-10/20	191560-10/20	200942-20	200952-20
Load type	Server or battery			
Max load including tool (kg)	150	150	90	90
Max lifting speed full (mm/s)	62	62	132	132
Platform type	Sliding or fixed		Fixed	
Height in "U"	42	60	42	60
Minimum height in "U"	1			
Weight (kg)	95	122	65	85
Front wheel	Swivel (std) or fixed			
Min turning radius* (mm)	Ø1095	Ø1222	Ø887	Ø1126
Safety regulations	CE 42/2006			

Options

Model	DC15 U42	DC15 U60	DC09 U42	DC09 U52
Sliding platform	◦	◦	-	-
Changes in height	◦	◦	◦	◦
Adjustable top switch	-	220642	-	220643
Sound signal	-	◦	-	◦
Light indication	-	◦	-	◦
ESD	◦	◦	◦	◦
Transfer rails	220647			
Clamping straps	◦	◦	-	-
Ladder	◦	◦	-	-
Raised profile 50mm	220648			




Batteries

Battery	Sealed, valve regulated, lead-acid batteries (VRLA)
Nominal battery voltage	24V DC (12V x 2)
Battery capacity	17Ah/12Ah
Nominal charge voltage	27.6V stand-by. 29V max voltage.
Nominal charge current	1350 mA - 2400 mA
Available plugs with charger**	Plug Type A – North America Plug Type C – Europe Plug Type G – UK Plug Type I – AU / NZ


* Central pivotal point calculated as center point between the diagonal swivel wheel pair

** The charger is CSA


Dimensions DC15 U42-10

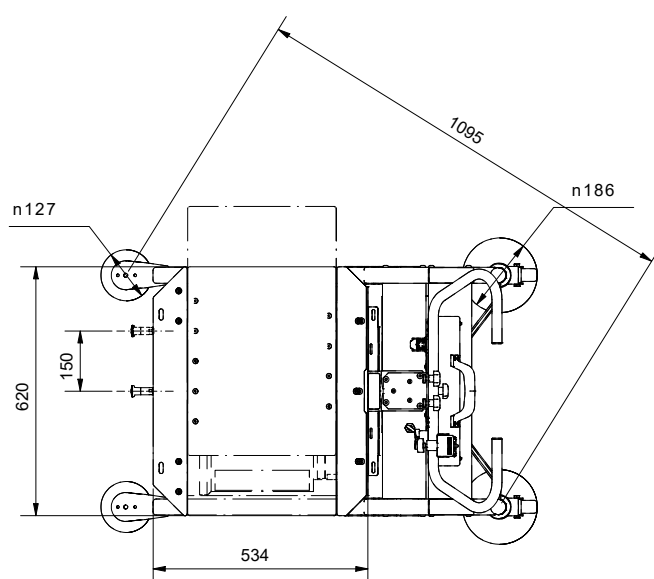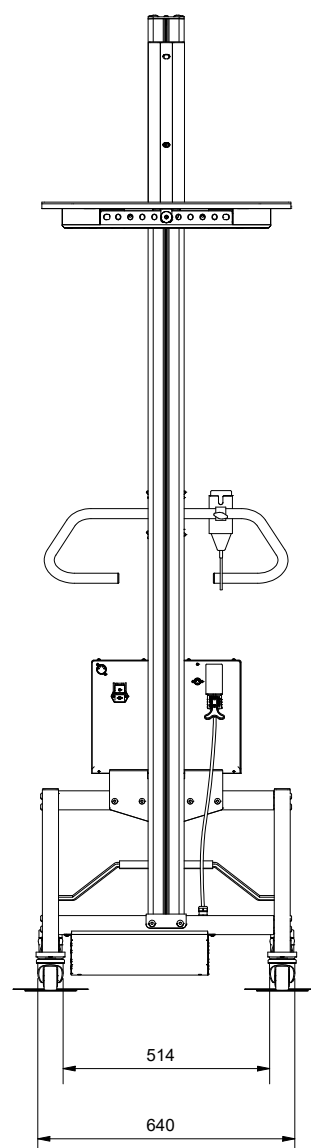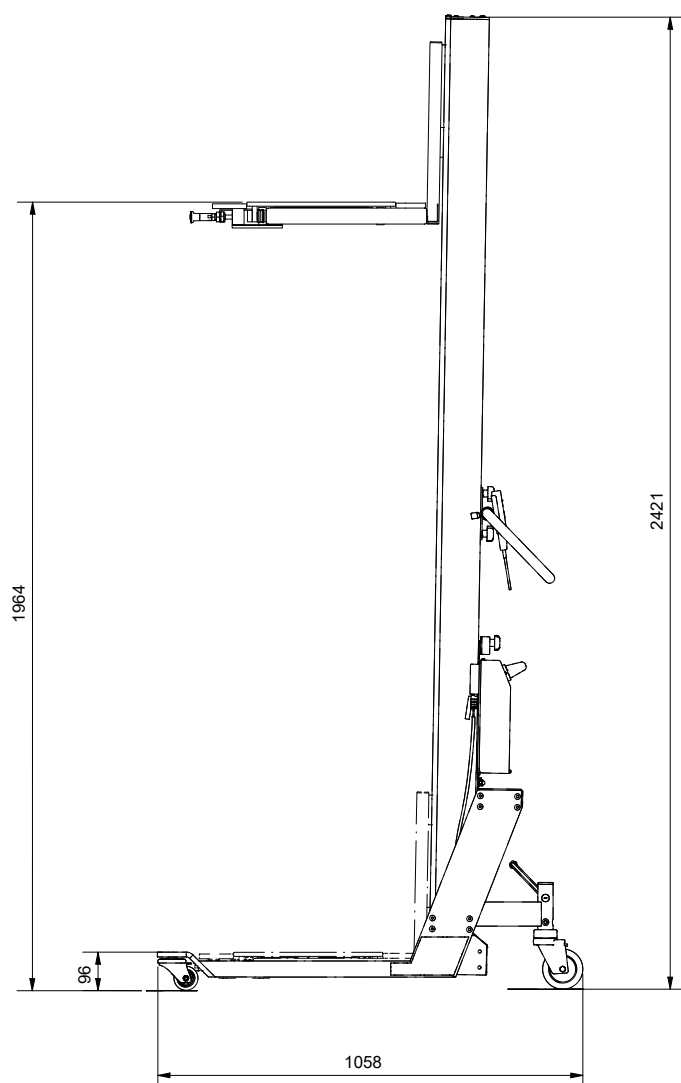


Dimensions DC15 U42-20

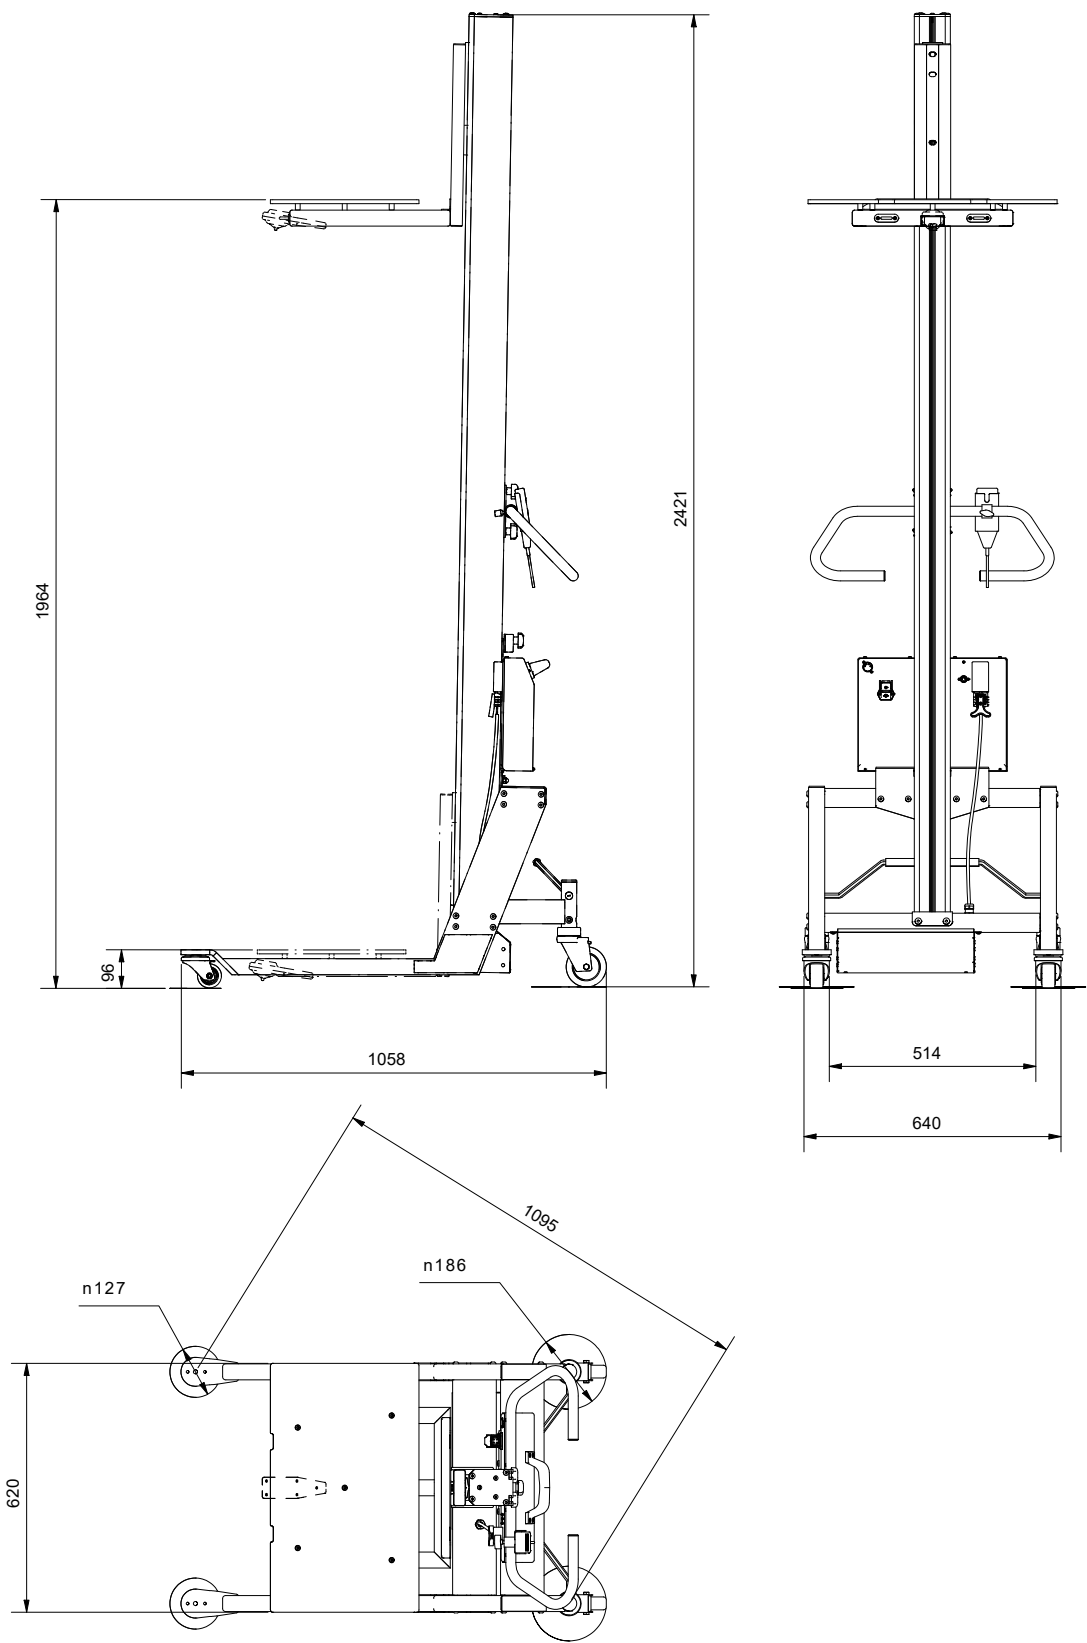




Dimensions DC15 U60-10

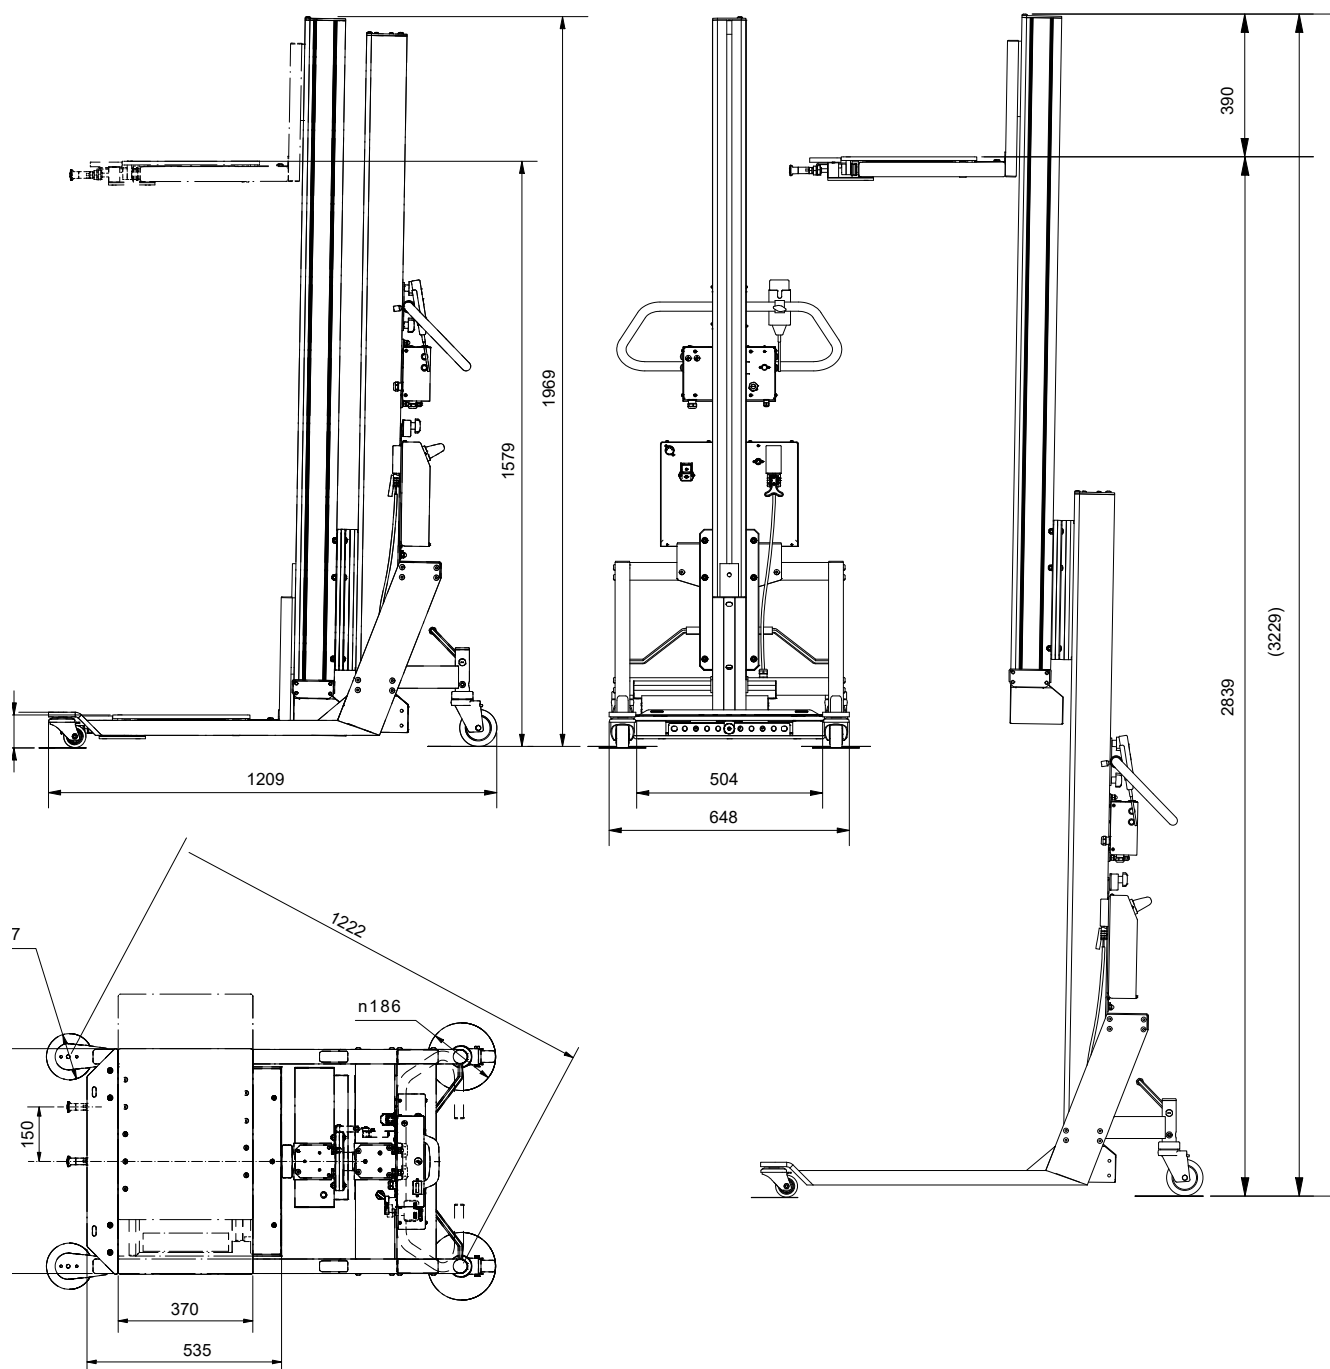


Dimensions DC15 U60-20

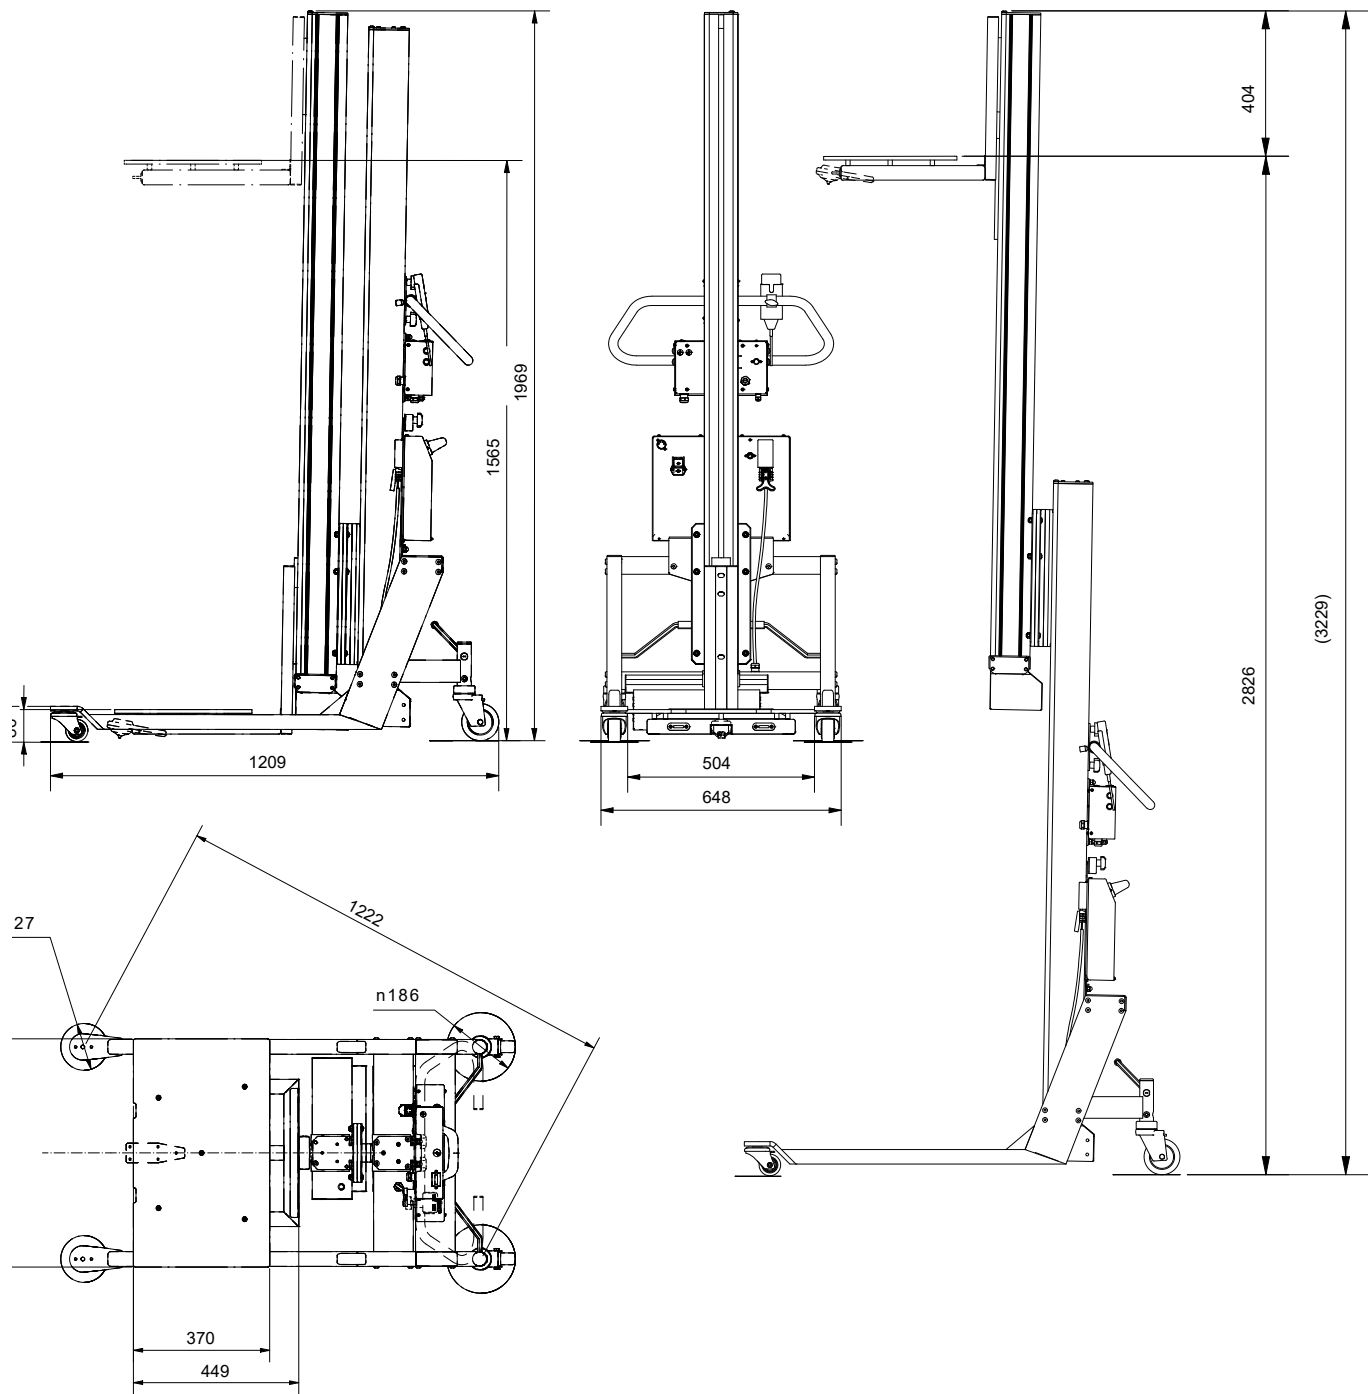

Dimensions DC09 U42

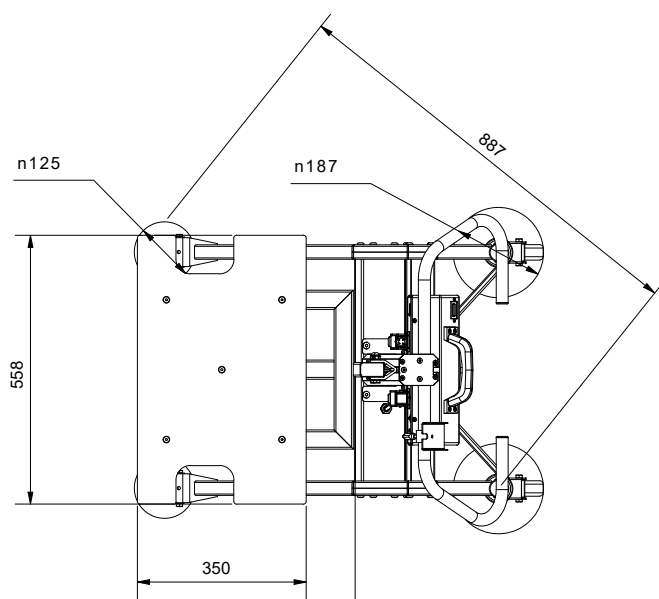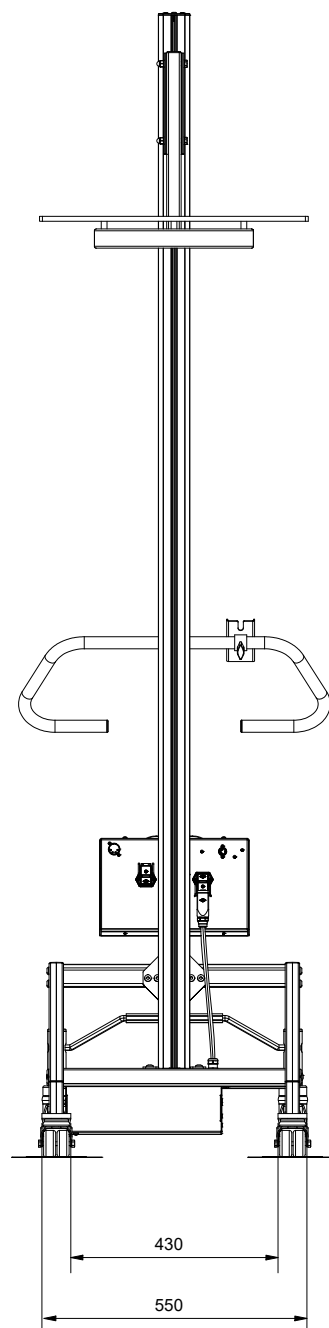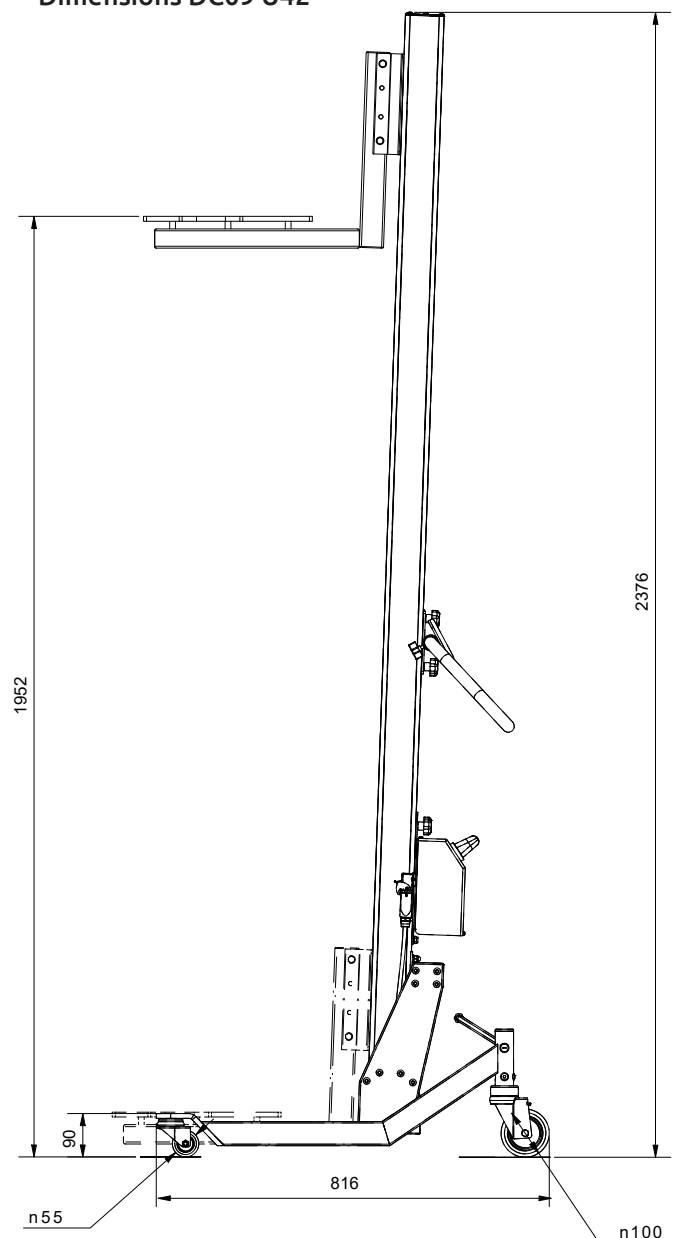

Dimensions DC09 U52

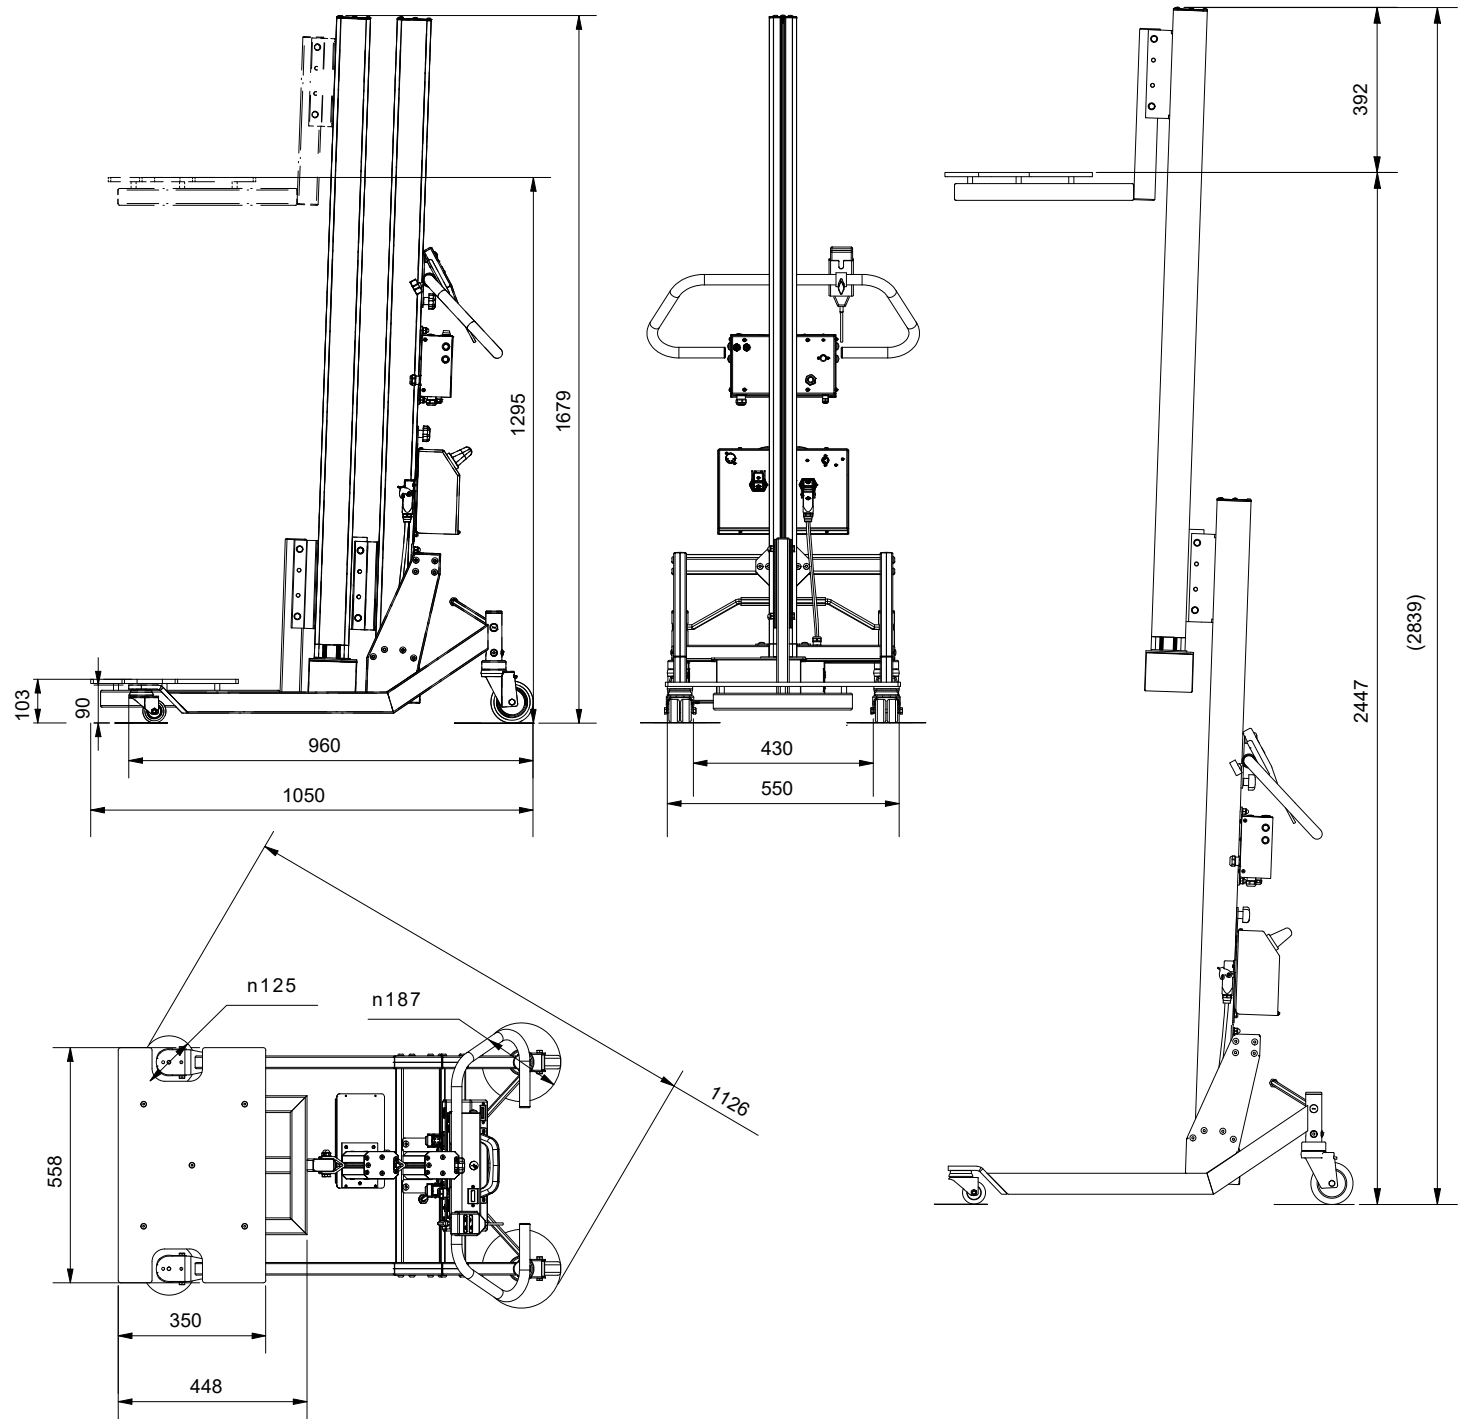



Transport und Hebegeräte

Adorena AG
Eichwiesstrasse 20
8645 Jona
Tel. 055 212 34 35
info@adorena.ch

Smart moves
for safe work



©2023 Pronomic AB
Alle Rechte vorbehalten. Alle
Angaben in diesem Prospekt sind
zum Zeitpunkt der Drucklegung
korrekt.

Pronomic behält sich Änderungen
der Produktdaten ohne vorherige
Ankündigung vor.